


# iAudioInterface2 Quick Start

To get up and running with your new iAudioInterface2 and microphone, just follow these steps:

## iPhone or iPad Connection

- Charge your iAudioInterface2
- Install AudioTools on your iOS device
- Plug iAudioInterface2 into your iOS device with the Lightning or USB-C cable. **Make sure the DIN plug is fully seated into the panel.** It should extend slightly past the front of the panel.
- You should see a pop-up, **Accessory Found**. This means you are connected correctly. If you get an Apple pop-up, choose **Other Device**

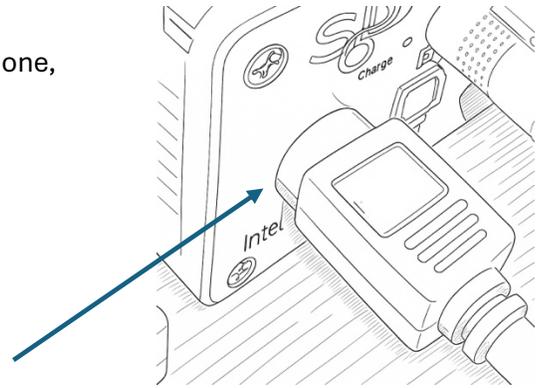

## Settings Page

- Go to the Settings menu, Microphone Setup
- The top item, **iAI2 Mic** should be highlighted yellow
- Tap the small **i** in the circle on the right to bring up **Microphone Calibration**

## Low Range Settings

- Tap **Low Range** on the top
- Tap the **Trim** field and enter the Trim value for the low range from the card
- Select the **Preamp Hardware Gain** selection on the bottom
- Turn on **48V Phantom Power**

## High Range Settings

- Tap **High Range** on the top
- Tap the **Trim** field and enter the Trim value for the low range from the card
- Select the **Preamp Hardware Gain** selection on the bottom
- Tap **Done** in the upper corner of this box to save the values. Tap **Done** again to exit this screen

You are fully calibrated, setup, and ready to use your iAudioInterface2!

## Using iAudioInterface2 with Mac or PC

- Connect using the USB-A cable – this puts the device in USB audio mode
- Select the audio route on the Mac Settings app, Sound page, or Windows Control panel. It will appear as iAudioInterface2 or as Zero Bandwidth.
- Setup using the iAudioInterface2 control panel to turn on phantom power and set gain.

For more information, see our website [studiosixdigital.com](http://studiosixdigital.com)